




1° Adjust the cable height using the cable lock

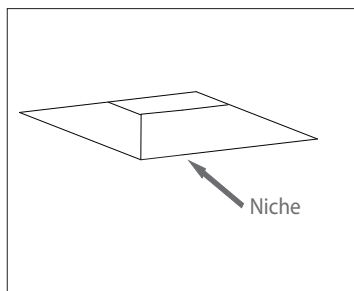


2° Make a 1"x1" niche in the liner

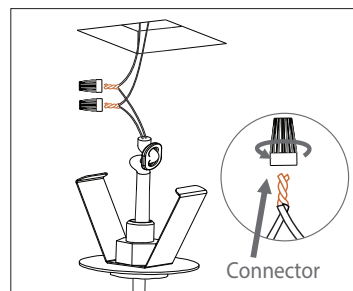

3° Install the electrical connection in the pendant using the connectors that comes with the product

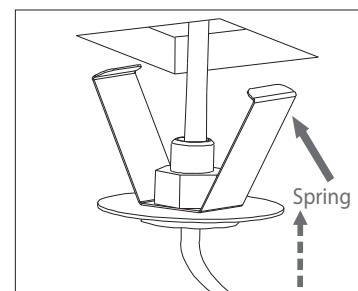

4° Press the spring and snap it into the niche

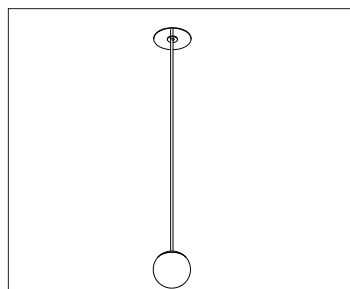

5°

ML-3200 3000K 195lm Ø 2 2/8 "

120V

Power: 2W

Weight: 0.38 lbs

Product indicated for indoor areas.

Attention

Follow the instructions to ensure proper and safe operation. We recommend that the installation be done by a qualified professional. Recessed ceiling installation requires rigid support point attachment and special installations require special attachment.

Important

Lamps, transformers, and reactors are not included with the product except as noted. Failure to follow the instructions in the manual could result in accidents and loss of warranty. Do not adjust springs and brackets unless otherwise indicated.
 Warranty: 1 year for product and 5 years for Led and Driver.

Cleaning and Maintenance

Before any action turn off the electric current. Clean only with water dampened flannel, never use chemicals or abrasives. The materials that make up the product are non-toxic.